


R32 Inverter Wall Mounted **C**-series



LUXURIOUS
COOLING COMFORT

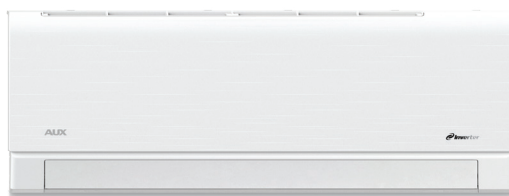

DC
INVERTER



HIGH
AIRFLOW



FAST
COOLING



ULTRA
SILENCE



4D
AIRFLOW



WIFI CONTROL
(Optional)

POWERFUL COOLING

★ Fast Cooling

Enjoy cooling comfort right away, as the compressor starts up at a high frequency of 65Hz*.


★ High Airflow

The extended and enlarged air outlet supplies more air volume than traditional ones.

★ Long-Distance Air Supply

Coolness reaches every corner of your room via the unique design of the air outlet.

*Data source: AUX Air Conditioner Lab.

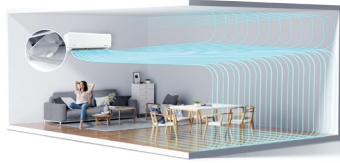

ULTIMATE COMFORT

★ 4D Airflow

Tailor your comfort via four adjustable airflow directions, including left and right.



★ Ultra Silence for A Better Sleep

Noise level greatly decreases, backed by the DC inverter technology and the double-layer sound-proof material.



ENERGY-SAVING & ECO-FRIENDLY

★ Efficient Inverter Technology



Inverter airconds consume less power compared to non-inverter models. Take care of our planet and save on your bills!

★ R32 Refrigerant


An eco-friendly refrigerant with better performance, higher refrigerating capacity and Lower GWP value.



SUPERIOR DURABILITY


★ Golden Fin

The anticorrosive golden coating on the heat exchanger makes it more resistant to salty air, rain and other corrosive elements.

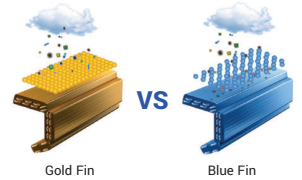


★ Anti-Corrosion

The outdoor unit is covered with a thin acrylic resin layer to enhance its resistance to salt corrosion. Less worries in coastal regions!

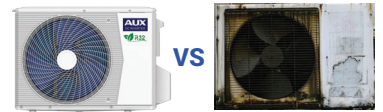

★ 4-Step Self Cleaning

Activate the iCLEAN function to keep the airflow fresh and enjoy healthy life.

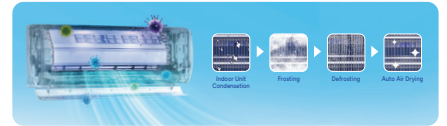

3/4/5 Warranty Policy*

Fees for parts and maintenance are borne by AUX during the maintenance period.



*AUX Air Conditioner (Malaysia) reserves the rights to change the warranty policy without further notice.



Indoor Unit



Outdoor Unit



Remote Control



Wired Controller (Optional)

Specifications

| Model | Indoor | | ASW-09CAR3DI | ASW-12CAR3DI | ASW-18CAR3DI | ASW-24CAR3DI |
|---|-----------------------------|------------------------|---|-------------------------|-------------------------|-------------------------|
| | Outdoor | | AS-09CAR3DI | AS-12CAR3DI | AS-18CAR3DI | AS-24CAR3DI |
| Cooling Capacity | Rated (Min~Max) | Btu/h | 10000 (2050-13600) | 12300 (4100-13600) | 18000 (4440-18000) | 24400 (6140-26000) |
| Power Consumption | | W | 960 (100-1200) | 1170 (200-1450) | 1730 (240-2200) | 2260 (230-2700) |
| Running Current | | A | 4.4 (0.56-5.32) | 5.1 (2.0-6.0) | 7.7 (2.3-9.0) | 9.7 (1.0-12.0) |
| Horsepower | | HP | 1.0 | 1.5 | 2.0 | 2.5 |
| Energy Efficiency Star Rating | | | | | | |
| Power Supply | | V,HZ,Ph | 220-240V~50Hz,1Ph (power supply to indoor) | | | |
| Indoor Unit | Indoor Air Flow (H) | m ³ /h(cfm) | 600 (353) | 650 (382) | 950 (530) | 1300 (765) |
| | Indoor Sound Level (H/M/L) | dB(A) | 37/35/31 | 38/36/31 | 43/40/36 | 47/43/39 |
| | Dimension (W*D*H) | mm | 774*202*299 | 834*202*299 | 997*222*312 | 1145*230*332 |
| Outdoor Unit | Outdoor Sound Level | dB(A) | 52 | 52 | 52 | 58 |
| | Dimension (W*D*H) | mm | 650*455*233 | 650*455*233 | 709*530*280 | 900*700*350 |
| | Refrigerant Charge | g | R32/360g | R32/360g | R32/690g | R32/1050g |
| Refrigerant Piping | Liquid Side/Gas Side | mm(inch) | Φ6.35/Φ9.52 (1/4"/3/8") | Φ6.35/Φ9.52 (1/4"/3/8") | Φ6.35/Φ12.7 (1/4"/1/2") | Φ6.35/Φ12.7 (1/4"/1/2") |
| | Max. Difference Pipe Length | m | 25 | 25 | 25 | 30 |
| | Max. Difference in Level | m | 10 | 10 | 10 | 20 |
| Indoor-Outdoor Connection Wiring (not included) | | | 4x1.0 mm ² | 4x1.0 mm ² | 4x1.5 mm ² | 4x2.5 mm ² |
| Power Supply Wiring (not included) | | | 3x1.0 mm ² | 3x1.0 mm ² | 3x1.5 mm ² | 3x2.5 mm ² |
| Thermostat Type | | | Wireless Remote Control (Wifi/Wired Controller, optional) | | | |

Remarks:

- All units are being tested and comply to ISO 5151, ISO 16358-1.
 - The noise level data reflects the level in anechoic chamber.
 - The above design and specifications are subject to change of product improvement without prior notice.
 - Nominal cooling capacity are based on the conditions: 27°C DB / 19°C WB indoor and 35°C DB outdoor.
 - The sound pressure levels are measured in anechoic chamber according to JIS C 9612 standard.
- Different room conditions can cause discrepancies in the sound pressure levels in actual situations.



AUX Malaysia



aux_malaysia



auxair.com.my

Authorised Dealer:

AUX Cloud Commerce (Malaysia) Sdn. Bhd.

PJ HQ Office : Unit No. T1-L 16, Tower 1, Level 16, PJ33, Jalan Professor Khoo Kay Kim, Seksyen 13, 46200 Petaling Jaya, Selangor.
Tel: 03-7932 1168 Mon-Fri, 8:30am-5:30pm (lunch hour 12pm-1pm, public holidays excluded)

Penang Branch : No.7 & 9, Ground Floor, Lorong Ceri 5, Taman Aman Jaya, 12300 Butterworth, Pulau Pinang. Tel: 04-323 7756

Melaka Branch : No.14 & 14-1, Jalan Lagenda 8, Taman 1 Lagenda, 75400 Melaka. Tel: 06-281 6517

Johor Branch : No.19 & 19-01, Jalan Molek 3/20, Taman Molek, 81100 Johor Bahru, Johor. Tel: 016-760 6492